


### FEATURES

- Centerless Ground and Standard Rolled
- 2G Threadform
- Lead Accuracy of  $\pm 0.015$ " per Foot
- Straightness of 0.10" per Foot
- 300 Series Stainless Steel

### ACME LEAD SCREW SELECTION

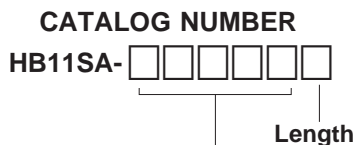

Screw Size Code	Screw Size O.D. - # Thds. - Starts	Root Dia. in.	Lead in.	Length in Feet
25201	* 1/4 - 20 - 1st	.190	.050	
25161	* 1/4 - 16 - 1st	.170	.063	
31082	5/16 - 8 - 2st	.230	.250	
31084	5/16 - 8 - 4st	.230	.500	
31122	5/16 - 12 - 2st	.230	.167	
37081	* 3/8 - 8 - stub	.290	.125	1, 3 & 6
37084	3/8 - 8 - 4st	.274	.500	
37055	Δ 3/8 - 5 - 5st	.243	1.000	
37045	Δ 3/8 - 4 - 5st	.243	1.200	
37101	* 3/8 - 10 - 1st	.255	.100	
37102	3/8 - 10 - 2st	.255	.200	
37114	3/8 - 11 - 4st	.268	.375	
37121	* 3/8 - 12 - 1st	.275	.083	2, 4 & 6
37122	3/8 - 12 - 2st	.310	.167	
37161	* 3/8 - 16 - 1st	.300	.063	
43082	7/16 - 8 - 2st	.360	.250	
43084	7/16 - 8 - 4st	.360	.500	
50101	* 1/2 - 10 - 1st	.390	.100	
50102	1/2 - 10 - 2st	.390	.200	
62081	* 5/8 - 8 - stub	.520	.125	
62101	* 5/8 - 10 - 1st	.515	.100	
62102	5/8 - 10 - 2st	.515	.200	
75061	* 3/4 - 6 - 1st	.563	.167	
75081	* 3/4 - 8 - 1st	.605	.125	
75101	* 3/4 - 10 - 1st	.630	.100	
10005	1 - 5 - 1st	.780	.200	
10008	1 - 8 - 1st	.855	.125	
10010	1 - 10 - 1st	.880	.100	

\* Single start screws. May be ordered in left hand on special order.

Δ Fast lead high helix lead screws.