



### FEATURES

- $\varnothing 16$  mm, rolled and polished.
- Material Cf 53, induction hardened to HRC 62  $\pm$  2.
- Pitch accuracy  $\leq 0.1$  mm / 300 mm, ISO class 7.
- Screw pitches of 2.5, 4, 5, 10 and 20 mm.
- Available with machined and unmachined ends in lengths up to 3 m.
- High life expectancy.
- Excellent cost/performance ratio.
- Produce greater than 90% efficiency in converting rotary to linear motion.
- Machined screws are designed to be held by a double bearing on one side and on the other side by either a floating bearing, or no bearing and a guiding ball nut.

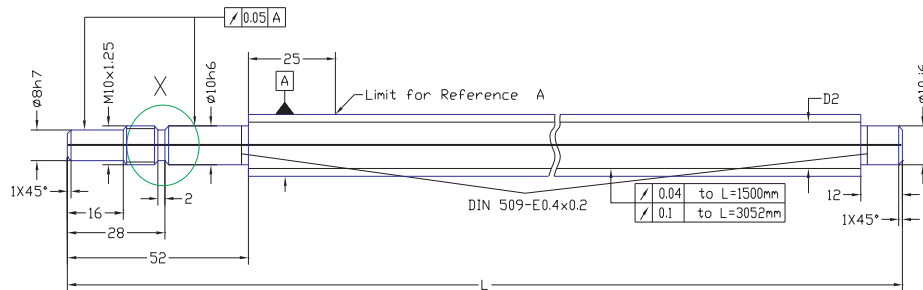

ROOT DIA. D2 = 12.98 FOR 5, 10, 20 mm PITCH  
 ROOT DIA. D2 = 13.34 FOR 2.5 mm PITCH



### CATALOG NUMBER

HL513  M     2

Pitch Code (mm)	Machining	Length Code	Length (mm)	Length Code	Length (mm)
2 - 2.5	0 - Unmachined	045	452	125	1252
3 - 4	2 - Machined	055	552	155	1552
4 - 5		065	652	175	1752
5 - 10		075	752	205	2052
6 - 20		085	852	225	2252
		095	952	275	2752
		105	1052	305	3052