



Acme Lead Screws (Inch)


FEATURES

- Centerless ground and standard rolled
- 2G threadform
- Lead accuracy of ± 0.010 " per foot
- Straightness of 0.010" per foot
- 300 series stainless steel



(Acme Nuts Purchased Separately)

ACME LEAD SCREW SELECTION

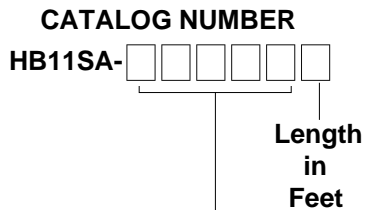

Screw Size Code	Screw Size O.D. - # Thds. - Starts	Root Dia. in.	Lead in.	Length feet
25201	* 1/4 - 20 - 1st	.19	.050	1 & 3
25161	* 1/4 - 16 - 1st	.17	.063	
31082	5/16 - 8 - 2st	.23	.250	1, 3 & 6
31084	5/16 - 8 - 4st	.23	.500	
31122	5/16 - 12 - 2st	.23	.167	
37081	* 3/8 - 8 - stub	.29	.125	
37084	3/8 - 8 - 4st	.27	.500	
37055	Δ 3/8 - 5 - 5st	.24	1.000	2, 4 & 6
37045	Δ 3/8 - 4 - 5st	.24	1.200	
37101	* 3/8 - 10 - 1st	.26	.100	
37102	3/8 - 10 - 2st	.26	.200	
37114	3/8 - 11 - 4st	.27	.375	
37121	* 3/8 - 12 - 1st	.28	.083	
37122	3/8 - 12 - 2st	.31	.167	
37161	* 3/8 - 16 - 1st	.30	.063	
43082	7/16 - 8 - 2st	.36	.250	
43084	7/16 - 8 - 4st	.36	.500	
50101	* 1/2 - 10 - 1st	.39	.100	2, 4 & 6
50102	1/2 - 10 - 2st	.39	.200	
62081	* 5/8 - 8 - stub	.52	.125	
62101	* 5/8 - 10 - 1st	.52	.100	
62102	5/8 - 10 - 2st	.52	.200	
75061	* 3/4 - 6 - 1st	.56	.167	
75081	* 3/4 - 8 - 1st	.61	.125	
75101	* 3/4 - 10 - 1st	.63	.100	
10005	1 - 5 - 1st	.78	.200	
10008	1 - 8 - 1st	.86	.125	
10010	1 - 10 - 1st	.88	.100	

* Single start screws. May be ordered in left-hand on special order.

Δ Fast lead high helix lead screws.